



## PLAN VIEW

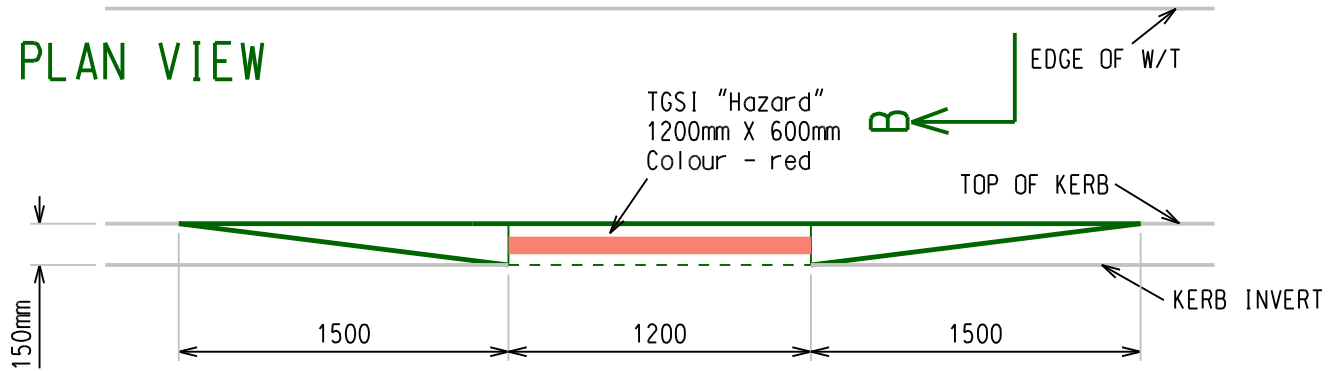

## SECTION A-A

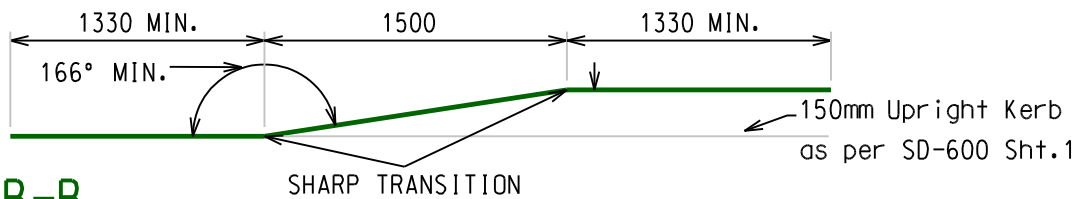

## SECTION B-B

### NOTE:-

1. ALL RAMPS TO BE IN ACCORDANCE WITH AS 2876-2000, AS 1428.1-2001, AS 1428.4-2002 and Austroads Part 13.
2. RAMP SURFACE TO BE ROUGHENED FOR TRACTION- broom finish or treated with a non-slip material
3. ALL RAMP AND KERBING CONCRETE TO CONTAIN BLACK OXIDE AT THE RATE OF 10Kgs./Cu.m. OF CONCRETE.
4. ALL CONSTRUCTION IN ACCORDANCE WITH COUNCIL'S "TECHNICAL SPECIFICATION FOR CONCRETE WORK".
5. KERB RAMP TO BE ALIGNED IN THE DIRECTION OF TRAVEL.
6. TGS1 - "HAZARD" TYPE ARE TO BE USED, MANUFACTURED AND INSTALLED TO AUSTRALIAN STANDARD AS 1428.4.

# STANDARD DETAIL

## KERB RAMP / FOOTPATH CROSSING

### 150mm UPRIGHT KERB

### MULTI DIRECTIONAL



CITY OF  
MITCHAM

DRAWING NO.

SD-600

SHEET

11-A

A4

DRAWN / DESIGNED  
J.R./A.O.

COPY ISSUE DATE

PREVIOUS ISSUE DATE  
July 2005

ISSUED DATE  
January 2007